

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/30130 A1

(51) International Patent Classification⁷: **H04N 05/63, 07/00**

(21) International Application Number: PCT/US01/30748

(22) International Filing Date: 1 October 2001 (01.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/237,567 3 October 2000 (03.10.2000) US
09/835,991 16 April 2001 (16.04.2001) US

(71) Applicant: SONY ELECTRONICS INC. [US/US]; 1 Sony Drive, Park Ridge, NJ 07656 (US).

(72) Inventor: UNGER, Robert, A.; 2072 Vista Hermosa Way, El Cajon, CA 92019 (US).

(74) Agent: BEHIEL, Arthur, J.; 7041 Koll Center Parkway, Suite 280, Pleasanton, CA 94566 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOW-POWER BROADCAST RECEIVER

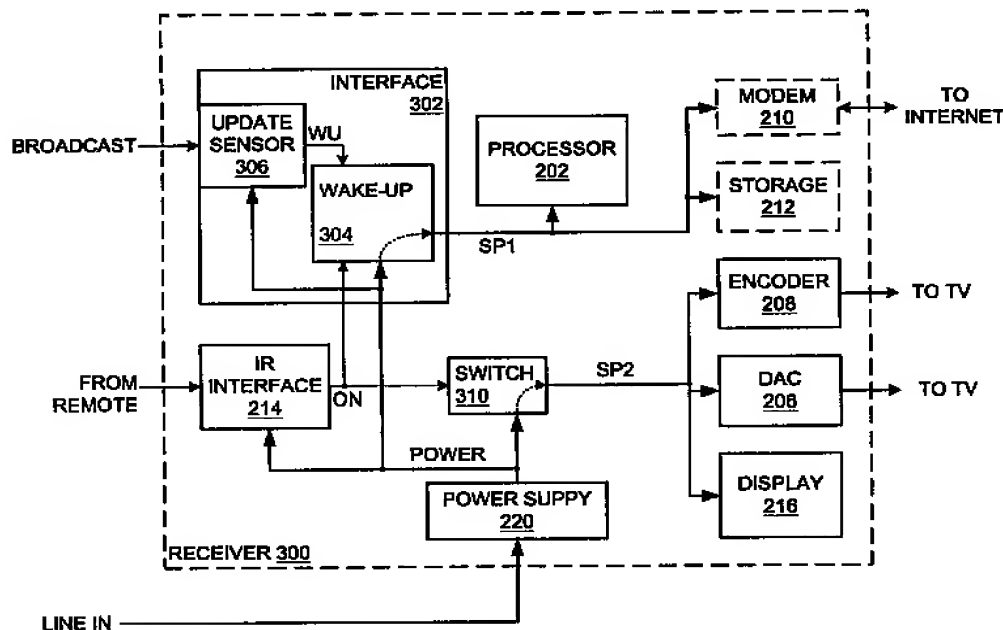

(57) Abstract: Broadcast receivers (300) operate in a power-saving standby mode while retaining the ability to receive broadcast program, software, and firmware updates. The most power hungry circuits are deprived of power in the standby mode using a wake-up switch (304) controlled by an update sensor (306) that actively monitors the broadcast channel in the standby mode. If the receiver (300) receives an update-pending indication while in the standby mode, then the wake-up switch (304) provides power to those components needed to receive the update without indicating a power-on condition to the user.



WO 02/30130 A1

LOW-POWER BROADCAST RECEIVER

Robert A. Unger

5 CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit under 35 U.S.C. §119(e)(1) of the Provisional Application filed under 35 U.S.C. §111(b) entitled "Wake Up Methods for Equipment in the Stand-by Mode," Serial No. 60/237,567 filed on October 3,
10 2000.

BACKGROUND

Figure 1 (Prior Art) is a diagram of a broadcast television system 100, including a broadcast headend 102
15 connected via a broadcast network to a number of receivers 104. The broadcast network can be wired (e.g., a cable system), wireless, or a combination of the two. Broadcast headend 102 optionally includes a server (not shown) maintained by a broadcaster to store digital information for
20 broadcast. Similar servers can be maintained by other entities and can be made available to receivers 104 via a separate broadcast medium or a direct connection, such as via a modem or satellite connection.

Each receiver 104 has a corresponding display, often a
25 conventional television set 106. Each receiver 104 connects to its respective television set 106 via an audio-video link 110. Users control receivers 104 via a user-input device, typically an infrared remote control 108 or a control panel (not shown) on their respective receivers 104.

30 Figure 2 is a block diagram of a typical digital receiver 104. A digital processor 202 is the "brains" of receiver 104. Processor 202 typically includes a number of components,

including a central processing unit (CPU) and memory, for example. Processor 202 has many variations, depending primarily upon the desired functionality. The internal workings of processor 202 are outside the scope of this
5 disclosure. Those interested in additional information about a typical set-top box may refer to U.S. Patent No. 5,940,074 entitled "Remote Upgrade of Software Over a Network," which is incorporated herein by reference.

An infrared interface 214 receives instructions from an
10 infrared remote control. A simple display 216 provides the user with a visual indication of e.g. whether receiver 104 is powered on and, if so, the channel to which broadcast interface circuit 204 is tuned. Processor 202 may present additional information to the user via the attached video
15 display. Receiver 104 optionally includes a modem 210 for connecting to the Internet and some form of local mass storage 212, such as a disk drive.

Processor 202 receives data derived from broadcast video signals by a broadcast-interface circuit 204. Broadcast
20 interface circuitry 204 includes one or more tuners that discriminate one signal from among a number of incoming broadcast signals and remove the associated carrier frequency. Interface circuitry 204 digitizes the resulting audio and video data and conveys the resulting digital information to
25 processor 202.

Processor 202 processes the information from interface circuit 204 as necessary to present appropriately formatted audio and video data to an audio digital-to-analog converter 206 and a video encoder 208, respectively. The resulting
30 signals are then conveyed to television 106 or some other display.

Receivers 104 receive periodic updates from broadcast headend 102. For example, a broadcaster may send each receiver 104 an updated program guide or a software update. Some components of receiver 104 must be powered up to receive
5 broadcast content; unfortunately, this means much of the receiver is always powered up, even when the user is not watching television, and has therefore turned off receiver 104. In the depicted example, a power supply 220 provides power continuously at least to broadcast interface circuit
10 204, processor 202, and IR interface 214. In point of fact, turning "off" common receivers similar to the ones described here typically removes power only from user display 216: turning off the user display comforts frugal consumers, but saves little power.

15 Leaving most of receiver 104 on at all times wastes power and money. To make matters worse, receivers of the type described herein are proliferating, and are in the process contributing to an epidemic of power shortages. There is clearly a need for more power-efficient broadcast receivers.

20 SUMMARY

The present invention is directed to broadcast receivers capable of operating in a power-saving standby mode while retaining the ability to receive broadcast program, software,
25 and firmware updates. The receivers have a broadcast interface that incorporates an update sensor adapted to sense broadcast updates.

The receiver includes a wake-up switch, controlled by the update sensor, that deprives the most power hungry circuits of
30 power in the standby mode. The update sensor, a relatively power efficient circuit, remains active at all times. User-

controlled input circuits, such as an infrared receiver or power switch, also remain active at all times.

If the receiver receives a wake-up instruction in the standby mode, then the sensor closes the wake-up switch to
5 provide power to those components needed to receive the update. In one embodiment, components not required for the update, such as the display, an audio DAC, and a video encoder, are not powered on during the update. This aspect of the invention saves power and avoids startling unsuspecting
10 users by automatically turning on their displays and speakers.

Receivers in accordance with one embodiment include a second power switch that selectively delivers power to those components not controlled by the wake-up switch. If the user instructs the receiver to turn on, then the wake-up switch and
15 second power switch both close (if they are not already closed) to provide power to the entire receiver. A display on the receiver typically provides a visual indication that the receiver is on, and audio and video signals provide contents for display on an associated display device, such as a
20 television.

If the user instructs the receiver to turn off during receipt of an update, then only the second power switch opens, leaving power to those components needed to receive the update. If, on the other hand, the user instructs the
25 receiver to turn off in the absence of an update, then both switches open, leaving the receiver in the standby mode.

The scope of the invention is defined by the claims, and not by this summary.

30 BRIEF DESCRIPTION OF THE FIGURES

Figure 1 (Prior Art) is a diagram of a broadcast television system 100.

Figure 2 (Prior Art) is a block diagram of a typical receiver 104.

Figure 3 depicts a receiver 300 in accordance with the present invention.

5 Figure 4 depicts an embodiment of broadcast interface 302.

Figure 5 depicts an embodiment of sensor 306 that enables the broadcaster to selectively awake only a select number of specified receivers.

10

DETAILED DESCRIPTION

Figure 3 depicts a receiver 300 in accordance with one embodiment of the present invention. Receiver 300 has many components in common with the conventional receiver 104 of
15 Figures 1 and 2, like components labeled using the same numbers. Unlike the conventional receiver, however, receiver 300 is adapted to operate in a power-saving standby mode while retaining the ability to receive broadcast program, software, and firmware updates. Most of the data and control paths are
20 unnecessary for understanding the present invention, and have therefore been eliminated for simplicity.

In accordance with the invention, receiver 300 includes a broadcast interface 302 with a wake-up switch 304 and an update-sensor 306. Instead of a direct connection to power
25 supply 220, power is applied to components employed in receiving updates via wake-up switch 304. Wake-up switch 304 thus deprives the most power-hungry circuits in receiver 300 of power in the standby mode. Update sensor 306, a relatively efficient circuit, remains active at all times. IR interface
30 214 also receives power at all times, and is therefore prepared to respond to power-on instructions from the user.

If receiver 300 receives a wake-up instruction while in the standby mode, then update sensor 306 provides a wake-up signal on line WU to wake-up switch 304. In response, switch 304 closes to provide power on switched-power line SP1 to
5 those components needed to receive the update, such as processor 202. In the depicted embodiment, components not required for the update, such as display 216, audio DAC 206, and video encoder 208, are not powered on during receipt of the update. This aspect of the invention saves power and
10 avoids startling unsuspecting users by automatically turning on their televisions and receivers.

IR interface 214 has a control output ON connected to a second power switch 310 and broadcast interface 302. If the user instructs receiver 300 to turn on, via IR interface 214
15 or an optional switch (not shown) on receiver 214, for example, then the control signal on line ON closes wake-up switch 304 to provide power to those components needed to receive the incoming signal, such as processor 202, display 216, audio DAC 206, and video encoder 208. The signal on line
20 ON also closes switch 310 to provide power to user display 216, audio DAC 206, and video encoder 208. Closing switch 310 provides a visual indication of the "on" condition and presents the requisite signals to the associated display, e.g., television 106. In one embodiment, receiver 300
25 provides switched line-in voltage to a socket (not shown) on receiver 300 to control power applied to television 106 or some other component.

If the user issues a power-off instruction, typically using a remote control to communicate with IR interface 214,
30 then the control signal on line ON opens switches 304 and 310 to remove power from the components connected to power supply 220 via switched-power lines SP1 and SP2. This action places

receiver 300 in a standby mode; power is still applied to IR interface 214 and broadcast interface 302: update-sensor 306 remains on to detect the presence of updates, such as a new program guide or a software or firmware upgrade.

- 5 Conventional wake-up circuits, such as those used to activate computer monitors from a standby mode, provide power in response to signals presented to the wake-up circuit. These conventional circuits are not used in receiver 300 because broadcast signals are generally always present.
- 10 Update sensor 306 is therefore adapted to differentiate between signals indicative of a pending update and other broadcast signals.

Figure 4 depicts an embodiment of broadcast interface 302. Broadcast interface 302 includes a conventional tuner
15 400 capable of discriminating one signal from among a number of incoming broadcast signals and removing the associated carrier frequency. A conventional digitizer 402 then digitizes the resulting video signal and conveys the resulting data to processor 202.

- 20 Tuner 400 and digitizer 402 collectively use a substantial amount of power. Tuner 400 and digitizer 402 are therefore connected to power supply 220 (Figure 3) via wake-up switch 304 so tuner 400 and digitizer 402 do not draw power in the standby mode.

- 25 In the depicted embodiment, wake-up switch 304 includes an OR gate 406 connected to a conventional power switch 410, typically a relay. Sensor 306 in turn includes a simple tuned circuit adapted to monitor a wake-up signal associated with one broadcast carrier frequency. In one example, sensor 306
30 produces an enabling logic-one output signal to OR gate 406 if the amplitude of the broadcast wake-up signal rises above a predetermined level for a period of time sufficient to reject

noise spikes, the rise in amplitude representing a wake-up instruction. If sensor 306 produces a logic one on one input of OR gate 406, then OR gate 406 produces a logic one output signal that closes power switch 410. Broadcast interface 302
5 thus applies power via the switched power line SP1 to whatever components are required to receive a subsequently broadcast update.

Sensor 306 does not close switch 310 (Figure 3) when awakening receiver 300 from the stand-by mode. In the absence
10 of power from switch 310, display 216 remains off and receiver 300 does not provide audio or video signals to the attached television or other display device. Thus, from the user's perspective, receiver 300 is in a standby mode. This feature of the invention is important, as users might otherwise be
15 startled or annoyed when their receiver and/or television automatically turns on without their instruction to do so. Receiver 300 might indicate the standby mode to the user; alternatively, receiver 300 might simply appear to be powered off.

Figure 5 depicts an embodiment of sensor 306 that enables
20 the broadcaster to awaken only a select number of specified receivers using, in one embodiment, a very low bit-rate asynchronous serial transmission. This version of sensor 306 includes a simple AM tuner 500, a digitizer 502, a shift
25 register 504, a receiver identifier 506 unique to each receiver and/or unique to the level of programming to which the receiver is entitled, a collection of exclusive-OR (XOR) gates 508 serving as a comparator, and an AND gate 510. Digitizer 502 can be the same or a different component from
30 digitizer 402 of Figure 4. If a single digitizer is used, then additional circuitry selects between tuner 400 and tuner

500, depending upon whether receiver 300 is in a standby mode, and the digitizer is supplied power in the standby mode.

In the embodiment of Figure 5, the amplitude of the wake-up signal remains high for the duration of the update. In
5 other embodiments, control of switch 304 passes to processor 202 once power is supplied from switch 304. Processor 202 then decides when to return receiver 300 to the standby mode. In another embodiment, processor 202 is always powered up, providing an intelligent means of responding to wake-up
10 instructions.

As before, tuner 500 is tuned to a carrier frequency that the broadcaster uses to convey wake-up signals. The wake-up signal includes an identifier intended to match all or part of the number stored in receiver identifier 506. The contents of
15 shift register 504 are continuously compared with the number stored in receiver identifier 506. If all bits match, the 64 XNOR gates 508 provide 64 logic ones to the 64 input terminals of an AND gate 510. AND gate 510 combines these output signals to produce a logic one output, thereby closing switch
20 304. If two corresponding bits on the inputs of XNOR gates 508 do not match, however, then XNOR gates 508 produce at least one logic zero output. Any logic zero to AND gate 510 causes AND gate 510 to output a logic zero, leaving switch 304 open and receiver 300 in the standby mode.

25 The example of Figure 5 assumes receiver 300 is in the standby mode to start with. If the receiver is powered upon receipt of the wake-up signal, power is already applied to the circuits required to receive the update. An additional connection (not shown) between the output of AND gate 510 and
30 processor 202 can be used to enable or block the incoming update, depending upon whether the receiver ID matched the incoming identifier.

Display 216 (Figure 2) is always responsive to user input, turning on and off in response to commands from IR interface 214. To avoid confusing the user, wake-up sensor 306 cannot turn display on or off automatically. Display 216
5 does not indicate a power-on condition when awakened by a wake-up instruction so users are not confused to see receiver 300 automatically power up; similarly, if the user elects to turn off receiver-unit 300 during an upgrade, receiver 300 remains active but switch 304 opens, turning off encoder 208,
10 DAC 206, and display 216. Receiver 300 enters the standby mode upon completion of the update. In other embodiments, display 216 or some other visual indicators, such as an LED, remain powered and indicate that receiver 300 is in a standby mode.

15 While the present invention has been described in connection with specific embodiments, variations of these embodiments will be obvious to those of ordinary skill in the art. For example, other components, such as modem 210, can be configured to initiate the "on" signal to awaken receiver 300.
20 Therefore, the spirit and scope of the appended claims should not be limited to the foregoing description.

CLAIMS

What is claimed is:

1. A broadcast receiver (300) comprising:
 - 5 a. a power supply (220) having a power-supply output terminal (POWER); and
 - b. a broadcast interface circuit (302) including:
 - 10 i. an interface-circuit input terminal adapted to receive a plurality of broadcast communications signals (BROADCAST) on the tuner input terminal, each signal modulated about a selected carrier frequency;
 - 15 ii. a tuner (400) having a tuner input terminal connected to the interface input terminal, wherein the tuner is adapted to select one of the signals and provide the selected signal on a tuner output terminal;
 - 20 iii. a wake-up sensor (306) having a sensor input terminal connected to the interface input terminal and a wake-up-sensor output terminal, the wake-up sensor being adapted to produce a wake-up signal on the wake-up-sensor output terminal in response to a first selected signal; and
 - 25 iv. a wake-up switch (304) having a wake-up-switch input terminal connected to the power-supply output terminal (POWER), a wake-up-switch output terminal, and a wake-up-switch control terminal connected to the wake-up-sensor output terminal.
- 30

2. The receiver (300) of claim 1, the wake-up sensor (306) further including a second tuner (500) tuned to a carrier frequency associated with the first selected signal.
- 5 3. The receiver (300) of claim 2, the wake-up sensor (306) further comprising a digitizer (502) connected between the tuner (500) and the wake-up-switch control terminal.
4. The receiver (300) of claim 1, wherein the tuner (400)
10 includes a power terminal (SP1) connected to the wake-up-switch output terminal.
5. The receiver (300) of claim 1, further comprising a display (216) capable of indicating a power-on condition
15 for the receiver (300), the display (216) having a power-input terminal connected to the power supply (220) via a second switch (310).
6. The receiver (300) of claim 5, wherein the display (216)
20 does not indicate a power-on condition in response to the wake-up signal.
7. The receiver (300) of claim 1, further comprising a processor (202) having a processor power terminal
25 connected to the wake-up-switch output terminal.
8. A broadcast communication network comprising:
 - a. a broadcast head-end (102) adapted to broadcast a plurality of signals about a corresponding plurality
30 of carrier frequencies, the signals including an occasional wake-up instruction;

- b. a plurality of receivers (300) adapted to receive the plurality of signals, each receiver including:
 - i. a power supply (220) having a power-supply output terminal (POWER); and
 - 5 ii. a broadcast interface circuit (302) including:
 - (1) an interface-circuit input terminal adapted to receive a plurality of broadcast communications signals on the tuner input terminal, each signal
 - 10 modulated about a selected carrier frequency;
 - (2) a wake-up sensor (304, 306) having a sensor input terminal connected to the interface input terminal and a wake-up-sensor output terminal, the wake-up sensor
 - 15 being adapted to produce a wake-up signal on the wake-up-sensor output terminal in response to first selected signal; and
 - (3) a wake-up switch (304, 410) having a wake-up-switch input terminal connected to the
 - 20 power-supply output terminal (POWER), a wake-up-switch output terminal, and a wake-up-switch control terminal connected to the wake-up-sensor output terminal.
 - 25
- 9. The network of claim 8, the wake-up sensor (304, 306) further including a tuner (500) tuned to a carrier frequency associated with the first selected signal.
- 30 10. The network of claim 9, the wake-up sensor (304, 306) further comprising a digitizer (502) connected between the tuner (500) and the wake-up-switch control terminal.

11. The network of claim 9, the interface circuit (302) including a second tuner (400) having a tuner input terminal connected to the interface input terminal,
5 wherein the second tuner (400) is adapted to select one of the signals and provide the selected signal on a tuner output terminal.
12. The network of claim 11, further comprising a processor
10 (202), the interface circuit further comprising a digitizer (502) connected between the tuner (500) and the processor (202).
13. The network of claim 11, wherein the second tuner (400)
15 includes a power terminal connected to the wake-up-switch output terminal.
14. The network of claim 8, further comprising, for each receiver (300), a display (216) capable of indicating a
20 power-on condition for the receiver (300), the display (216) having a power-input terminal connected to the power supply (220) via a second switch (310).
15. The network of claim 14, wherein the display (216) does
25 not indicate a power-on condition in response to the wake-up instruction.
16. A method of reducing power usage in a broadcast receiver (300), the method comprising:
30 a. monitoring, in a standby mode, a user-input device (108) for a power-on instruction;

- b. indicating a power-on condition for the receiver (300) in response to the power-on instruction;
 - c. monitoring the user-input device (108) for a power-off instruction;
 - 5 d. indicating a standby condition for the receiver (300) in response to the power-off instruction; and
 - e. monitoring, with the receiver (300) in the standby condition, a broadcast communication channel for a wake-up instruction.
- 10
17. The method of claim 16, further comprising, upon receipt of the wake-up instruction, providing power to a first portion of the receiver (300) and indicating a standby condition for the receiver (300) while receiving a
- 15 receiver update.
18. The method of claim 17, further comprising, upon receipt of a power-on instruction in the standby condition, providing power to the first portion and a second portion
- 20 of the receiver (300) and indicating the power-on condition.
19. The method of claim 16, wherein indicating a power-on condition includes providing a video signal to a video
- 25 display device (216).
20. The method of claim 16, wherein the user-input device (108) comprises an infrared receiver.
- 30 21. A broadcast receiver (300) comprising:
- a. means (214) for monitoring a user-input device (108) for a power-on instruction;

- b. display means (216) for indicating a power-on condition for the receiver (300) in response to the power-on instruction;
 - c. means (214) for monitoring the user-input device for a power-off instruction;
 - d. means responsive to the power-off instruction for indicating a power-off condition for the receiver (216); and
 - e. means (306) for monitoring a broadcast communication channel for a wake-up instruction with the receiver in the power-off condition.
22. The receiver (300) of claim 21, wherein the means for monitoring the broadcast communication channel includes a power switch (410) for providing power to a processor (202) in response to the wake-up instruction.
23. The receiver of claim 22, wherein the display means (216) indicates the power-off condition when the power switch (410) provides power to the processor (202) in response to the wake-up instruction.

1/3

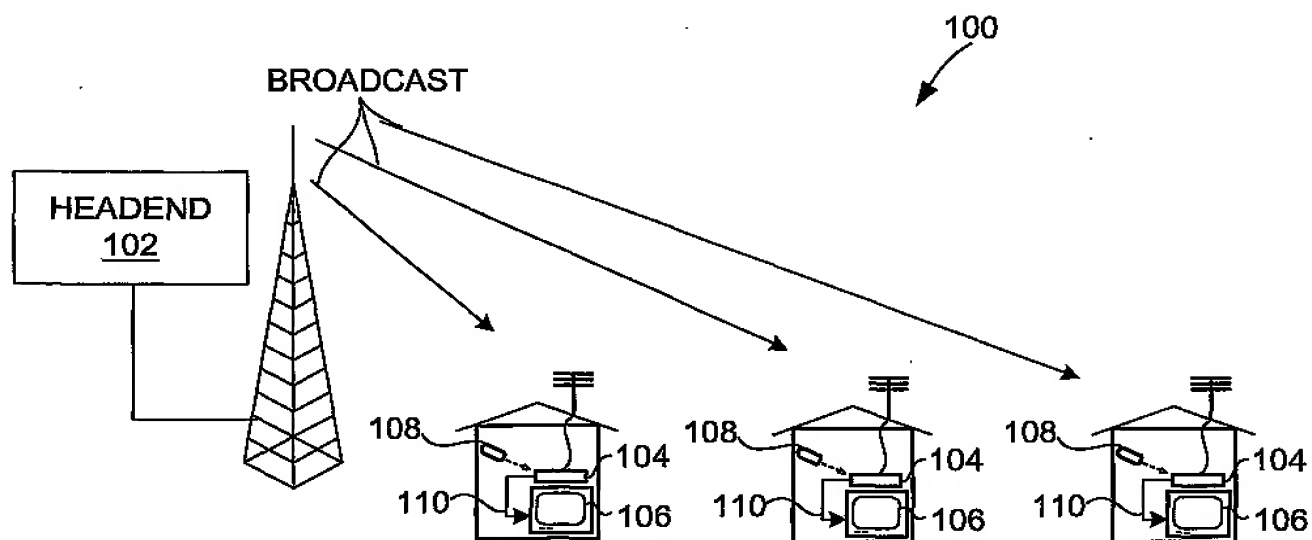


FIG. 1 (PRIOR ART)

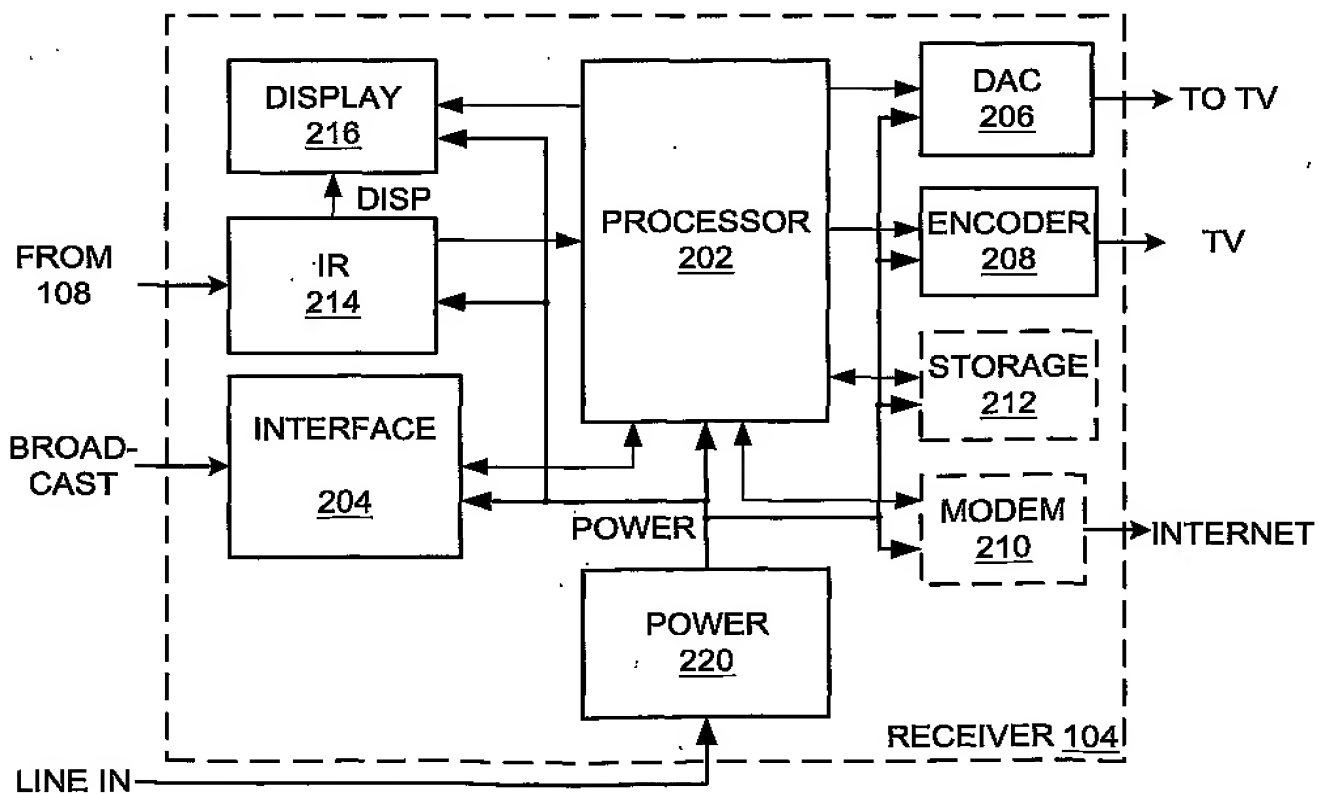


FIG. 2 (PRIOR ART)

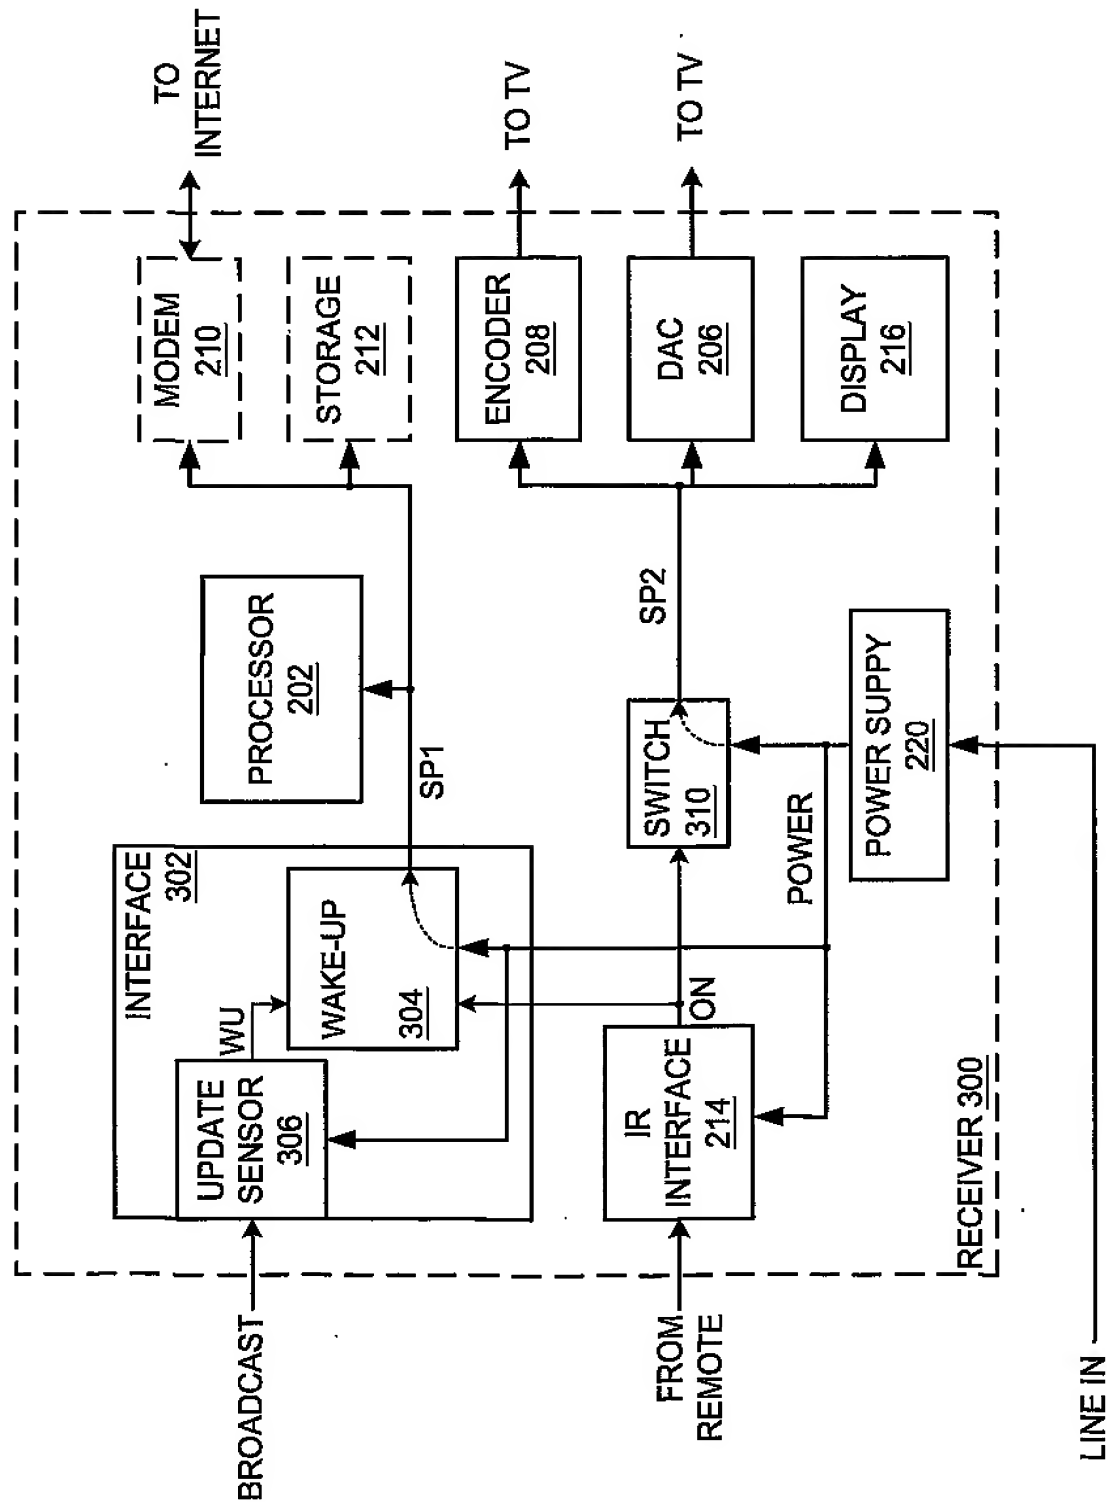


FIG. 3

3/3

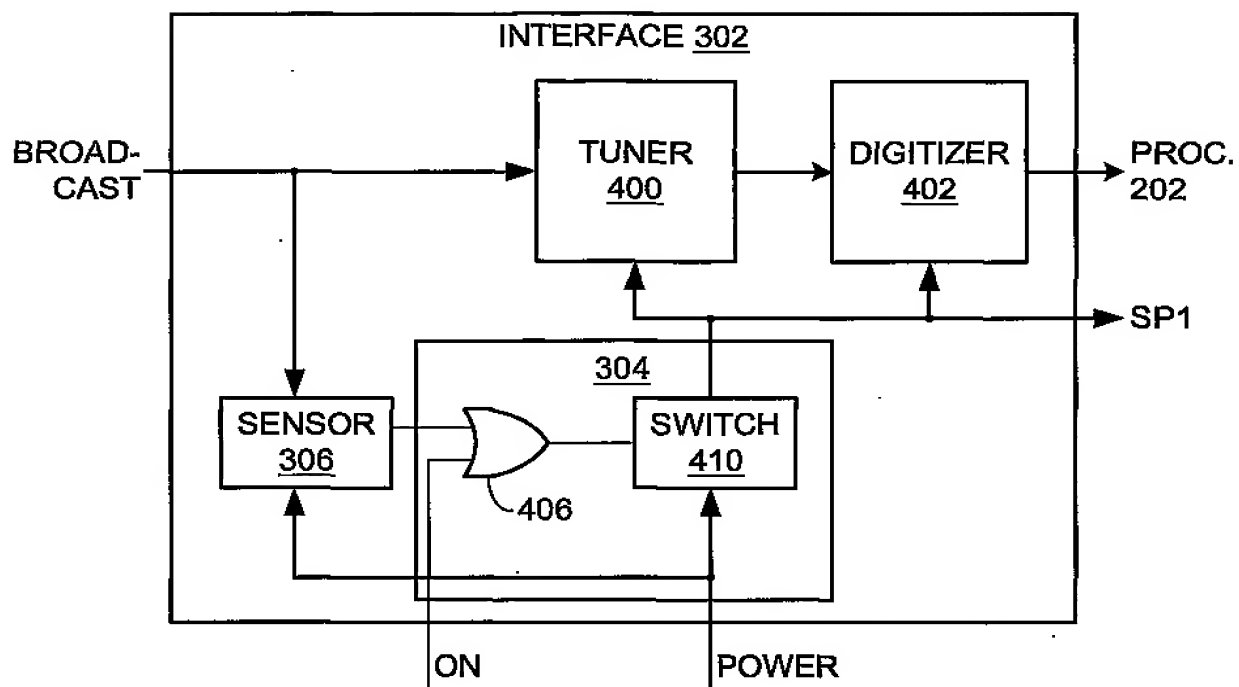


FIG. 4

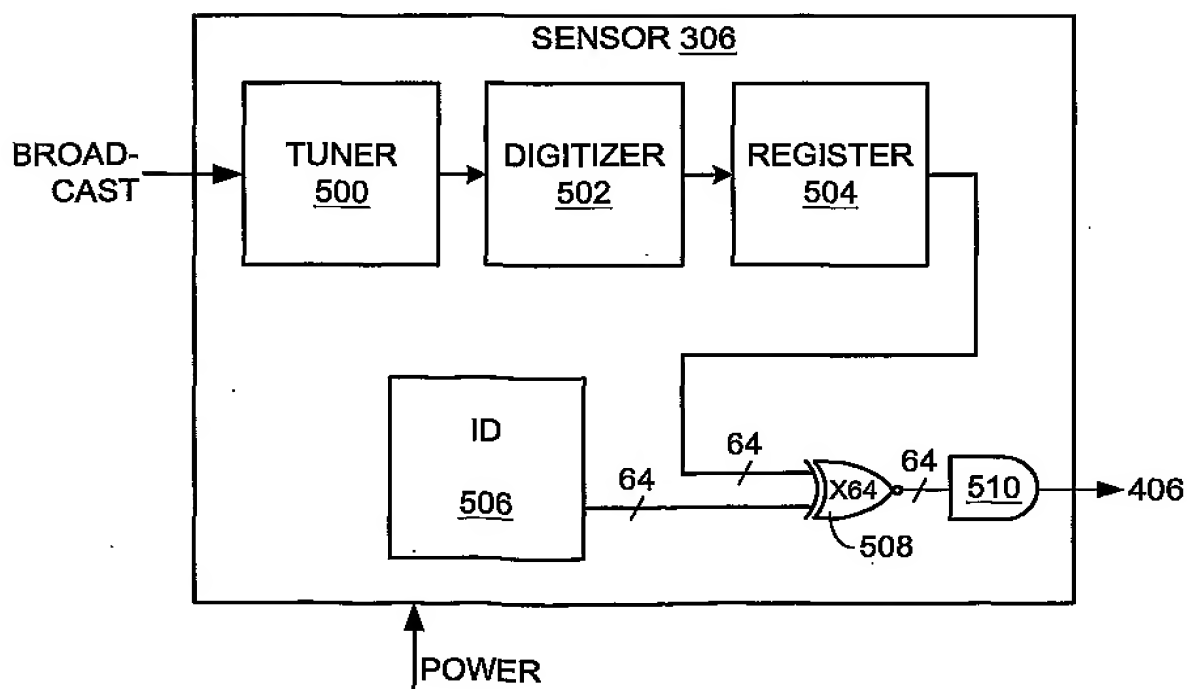


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/30748

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04N 05/63, 07/00

US CL : 348/552, 730, 554; 345/211, 212

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/552, 730, 554, 705, 706, 558; 345/211, 212, 214; 455/38.3

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Continuation Sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X | US 4,858,006 A (SUZUKI et al) 15 August 1989 (15.08.1989), entire document. | 1-23 |
| X,P | US 6,285,406 B1(BRUSKY) 04 September 2001 (04.09.2001), entire document. | 1-23 |
| A | US 5,894,331 A (YANG) 13 April 1999 (13.04.1999), entire document. | 1-23 |
| A | US 5,296,932 A (LONG) 22 March 1994 (22.03.1994), entire document. | 1-23 |
| A | US 5,625,882 A (VODAK et al) 29 April 1997 (29.04.1997), entire document. | 1-23 |
| A | US 5,555,032 A (KUNG) 10 September 1996 (10.09.1996), entire document. | 1-23 |
| A | US 5,870,613 A (WHITE et al) 09 February 1999 (09.02.1999), entire document. | 1-23 |
| A | US 6,054,981 A (KIMOTO et al) 25 April 2000 (25.04.2000), entire document. | 1-23 |
| A | US 5,883,669 A (HITACHIYA et al) 16 March 1999 (16.03.1999), entire document. | 1-23 |



Further documents are listed in the continuation of Box C.



See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | |
| "A" document defining the general state of the art which is not considered to be of particular relevance | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "E" earlier application or patent published on or after the international filing date | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" document referring to an oral disclosure, use, exhibition or other means | "&" document member of the same patent family |
| "P" document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

01 December 2001 (01.12.2001)

Date of mailing of the international search report

02 JAN 2002

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Linus H. Lo

Telephone No. : 703-305-4839

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/30748

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| A | US 5,170,159 A (KAWABATA et al) 08 December 1992 (08.12.1992), entire document. | 1-23 |
| A | US 5,903,765 A (WHITE et al) 11 May 1999 (11.05.1999), entire document. | 1-23 |
| A | US 5,249,164 A (KOZ) 28 September 1993 (28.09.1993), entire document. | 1-23 |

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/30748

Continuation of B. FIELDS SEARCHED Item 3:

East

search terms: tuner, stand\$, power, wake\$